

# Plate Dispenser Metos Drop-In LPDW-S 1x320 420x420 Heated

#### MG4138954

One heated cylinder, heating effect 0.35kW. Regulation range for temperature is 0 -  $+90^{\circ}$ C

- capacity about 60 plates
- max. diameter of plates 320 mm
- drop-in model without side panels
- drop-in hole size 382mm x 382mm
- unit's edge is 15 mm above the furniture's top plate
- recommended height of furniture 900 mm
- easily adjustable spring power according to weight of the plates
- easy to service cassette model heating unit

### Accessories:

- Adjustment rods





## Plate Dispenser Metos Drop-In LPDW-S 1x320 420x420 Heated

Product capacity	65 plates
Item width mm	420
Item depth mm	420
Item height mm	720
Package volume	0.16
Unit of volume	m3
Package volume	0.16 m3
Package length	45
Package width	48
Package height	74
Package unit of dimension	cm
Package dimensions (LxWxH)	45x48x74 cm
Net weight	40
Net weight	40 kg
Gross weight	28
Package weight	28 kg
Unit of weight	kg
Connection power kW	0.5
Fuse Size A	10
Connection voltage V	230
Number of phases	1NPE
Frequency Hz	50/60
Startup current A	2.2
Protection rating (IP)	20
Electrical cable length mm	3200
Type of electrical connection	Plug
Function	warm



### **Product sheet NO**



### Drop-in Plate dispenser Metos D-I LPDW-S 320 heat

Electric connection: 230V 1~ 0,7 kW 10A The length of the connection cable is 3,2 m.


When constructing the counter, an opening for the connection cable must be considered. The opening must be at least the size of a plug (diameter min. 40 mm). In addition, the edges of the opening must be finished to make sure that the connection cable is not damaged by rubbing against the opening edge.

The counter, where drop-in units are installed, must be damp-proof and strong enough to bear the appliance weight.

Net weight: D-I LPDW-S 320 25 kg



### Installation on top of the table

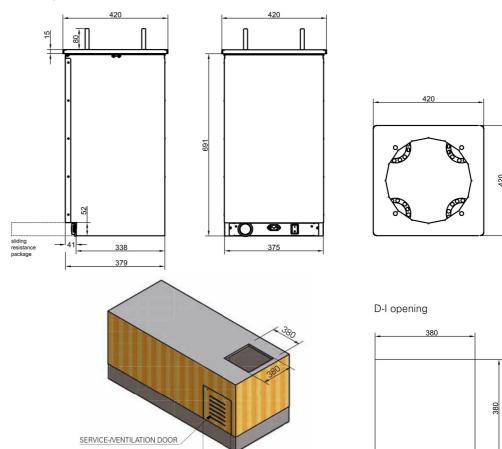

This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.